

MODEL 2025E

13 LBF MODAL SHAKER

- Through-hole armature with chuck and collet attachment provides simple set-up with modal stingers
- Lightweight and portable – weighing just 13 lb (6 kg) with an approximately 5 in (125 mm) square footprint
- Trunnion base provides flexibility and easy set-up when aligning the shaker and choosing best exciter location(s)
- 0.7 in stroke and broad frequency range supply adequate input energy for most small to mid-sized modal test applications
- Ambient air cooling sufficient to meet full shaker performance (13 lbf_{58N}) specifications

MODAL TESTING


For many experimental modal test applications, an electrodynamic shaker system is best suited for creating an appropriate input forcing function. Distributing adequate input force energy across the test structure and obtaining accurate and reliable input force measurements is critical for successful modal and structural testing. This requires a shaker that is highly portable, rugged and easy to set up in order to position in the best exciter location while minimizing any unwanted interaction between the exciter and test structure.

The Modal Shop's Modal Shaker Model 2025E, a very lightweight electrodynamic modal exciter, is capable of providing up to 13 lbf (58 N) of peak force excitation in a small footprint weighing just 13 lb (6 kg). With a 0.7 in (18 mm) general purpose stroke and useful frequency range beyond 9 kHz, the 2025E is suitable for structural testing and experimental modal analysis applications, including single and multiple inputs (SIMO and MIMO) using random, burst random, sine dwell or chirp excitation signals.

The 2025E modal exciter is supplied in a trunnion base allowing full rotation for easy set-up. The through-hole armature design with chuck and collet attachment is ideal for use with either traditional modal stinger rods or piano wire stingers. These stingers greatly simplify test set-up with an easy connection to the force sensor and test structure, and help decouple cross-axis force inputs, minimizing input force measurement errors while using the modal shaker.

Light

Heavy

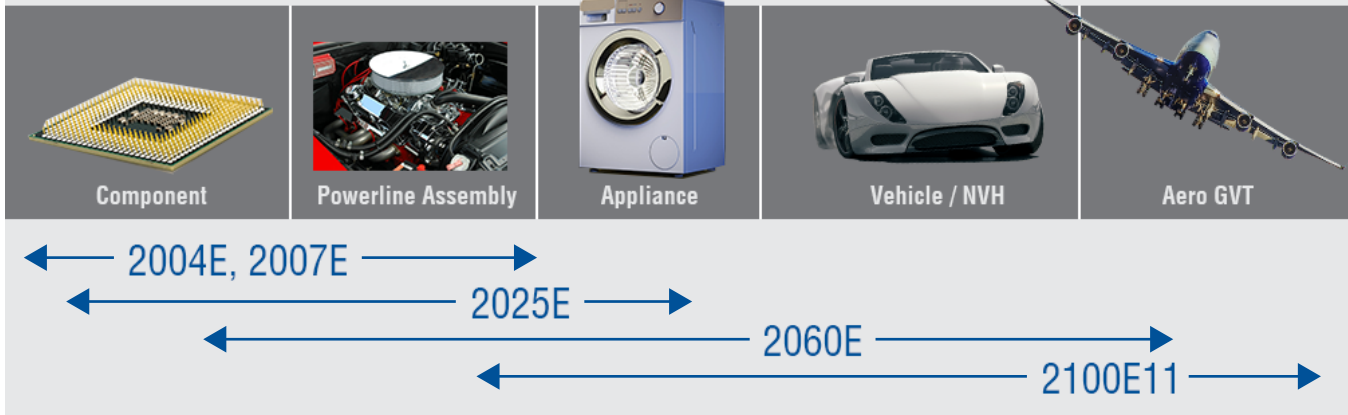

SPECIFICATIONS	
Performance	
Output Force, sine pk, ambient air cooling	13 lb (58 N)
Stroke Length, pk-pk	0.7 in (18 mm) ^[1]
Frequency Range, nominal	DC - 9000 Hz ^[2] ^[3]
First Resonance Frequency, nominal	> 6000 Hz ^[3]
Maximum Acceleration, bare table	72 g (700 m/s ²) pk
Maximum Velocity	120 in/s (3 m/s) pk
Protection Features	Mechanical stops
	Over-current (in-line fuse)
Physical	
Maximum Current, ambient air cooling	12.5 A RMS
DC Resistance, armature, nominal	0.5 Ω ^[4]
Armature Suspension System	8 pcs carbon fiber composite flexures
Effective Armature Mass	0.35 lb (0.159 kg)
Dimensions (H x W x D), nominal	8.65 x 8.82 x 4.25 in (220 x 224 x 108 mm) ^[5]
Weight, nominal	13 lb (6 kg)
Operating Range	40 – 100 °F (4 – 38 °C), < 85% RH

Supplied Accessories	
Trunnion base with EasyTurn™ handles	
Shaker cable 10 ft (3 m)	
Chuck with collets	
10-32 mounting adaptor	
Stinger kit (Models 2150G12, 2155G12 and K2160G)	
Suggested Accessories	
2100E21-400	SmartAmp™ Power Amplifier 400 W, 92% efficient, continuous gain adjustment
PCB 288D01	ICP® impedance head driving point sensor
PCB 208	PCB 208 series ICP® force sensors

- [1] Mechanical stops at 0.75 in (19 mm).
 - [2] Frequency range based upon ISO 5344 recommended useful range of 1.5 times first resonance frequency.
 - [3] Load dependent.
 - [4] Room temperature, 68 °F (20 °C).
 - [5] Reference outline drawing for exact dimensions.
- Front left photo taken in cooperation with Belgian Defense

THE MODAL SHOP

AN MTS COMPANY

10310 Aerohub Boulevard, Cincinnati, OH 45215 USA
 Toll-Free in the USA: 800 860 4867
 Phone: 1 513 351 9919 | Email: info@modalshop.com

The Modal Shop, Inc. offers structural vibration and acoustic sensing systems and services for various applications in design and test laboratories as well as manufacturing plants. An extensive sound and vibration rental program, precision calibration systems, and both modal and vibration shakers are designed to simplify test phases. Non Destructive Testing Systems help manufacturers provide 100% quality inspection of metal components. The Modal Shop, Inc. is a subsidiary of PCB Piezotronics, Inc., and PCB® is a wholly owned subsidiary of MTS Systems Corporation.

© 2020 The Modal Shop, Inc. In the interest of constant product improvement, specifications are subject to change without notice. PCB®, ICP®, Swiveler®, Modally Tuned®, and IMI® with associated logo are registered trademarks of PCB Piezotronics, Inc. in the United States. ICP® is a registered trademark of PCB Piezotronics Europe GmbH in Germany and other countries. UHT-12™ is a trademark of PCB Piezotronics, Inc. SensorLine™ is a service mark of PCB Piezotronics, Inc. SWIFT® is a registered trademark of MTS Systems Corporation in the United States. All other trademarks are property of their respective owners.



MTS Sensors, a division of MTS Systems Corporation (NASDAQ: MTSC), vastly expanded its range of products and solutions after MTS acquired PCB Piezotronics, Inc. in July, 2016. PCB Piezotronics, Inc. is a wholly owned subsidiary of MTS Systems Corp.; IMI Sensors and Larson Davis are divisions of PCB Piezotronics, Inc.; Accumetrics, Inc. and The Modal Shop, Inc. are subsidiaries of PCB Piezotronics, Inc.